



Portable EV Discharger for EU

Amagicar Level 2 Ev Charger Portable Ev Charging Cable 15a Type 1 Electric Vehicle Charger This is an portable EV Discharger and easy to carry, outdoors, picnics and trips use. The app portable EV Discharger is convenient to portable, stable in performance and has a complete protection mechanism. The

Product Description

Amagicar Level 2 Ev Charger Portable Ev Charging Cable 15a Type 1 Electric Vehicle Charger

This is an portable EV Discharger and easy to carry, outdoors, picnics and trips use. The app portable EV Discharger is convenient to portable, stable in performance and has a complete protection mechanism. The LCD indicator light display of the portable EV Discharger can show the charging status. This device has app/blue tooth function that can be adapted to it through you pone. WOCOR® look forward to becoming your long-term portable EV Discharger partner in china.

This portable EV Discharger is the latest invention and have high-quality ETL/FCC/CE/CQC/ certification. The portable EV Discharger body box is made of PC94VO material, which has been designed to prevent the product from overheating during use of safety problems and indication of working status very well. The portable EV Discharger can be used with app/blue tooth and 4G scan code. The specifications of (3.75KW) with portable EV Discharger can be OEM/ODM according to your needs. portable EV Discharger combines with 1.5m electric wire, a charging box and electric gun. The interface have There are European, American and national standard of the portable EV Discharger. WOCOR® look forward to becoming your long-term EV charger partner in china.



| Electrical Specification | | Working Environment | |
|--------------------------|-----------------------|-------------------------|----------------------|
| AC input voltage | 110V-250V | Protection degree | IP66 |
| AC power frequency | | Environment temperature | -20°C ~+40°C |
| Nominalpower | 3.75KW(Three Phase) | Relative humidity | 10%~90% frostless |
| Output rated current | AC/113A (Three Phase) | Maximum altitude | <2000m |
| Charging interface type | | Cooling | Natural air cooling |

The portable electric car charger belongs to the portable EV Discharger (3.75KW), and the charging power is generally 3.75kW. In order to prevent potential safety hazards due to incorrect use, please read the equipment manual carefully before use. Do not charge in places that do not meet the charging conditions. Ensure that the power supply and wiring are in a normal state before use.

- * Do not immerse the device in water.
- *Do not use it in an environment that exceeds the operating temperature.
- *Do not put your fingers into the car end plug when the device is connected to the power source.
- *Do not use when the equipment and cables are found to be damaged.

*Do not use the device for charging other than electric vehicles.



Portable EV Discharger

13A | 1Phase 110-250V | Type 2 to Uk /Type C/ USB Outlet

Convenient for outdoor entertainment



CE



IP 66



-25°C~+55°C



TPU



Leakage
Protection


The Overall Structure is Clear at a Glance

2.5mm² copper+TPU

ICE 62196-2 Female Plug



Overload Protection Button

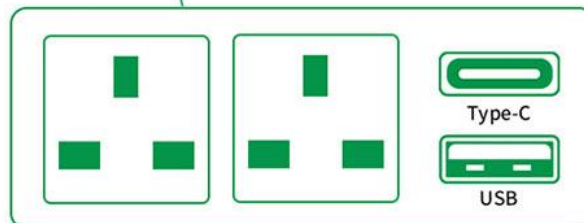

US*2 + Type C*1+ USB*1 socket

What's it?

With our discharger to get your car battery power out to support other electronic product, such as cellphone, computer or barbecue grill etc...Make you NO worries about the no-power journey, get much safer and happier journey.



Excellent Weather Resistance

It is more resistant to cold and high temperature, even if used in $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$ outdoor environment, it can still be used normally

-25°C

$+55^{\circ}\text{C}$



IP66 Waterproof Portable EV Charger

IP66 ensure the perfect work outdoors in any
environment including rain and snow.



PRODUCT PARAMETERS



Waterproof Level: IP66
Working Current: 15Amp
Maximum Working Power: 3.75KW
Service Life: >10,000Time
Insulation Resistance: >1000MQ

Operating Voltage: 110-250V
Operating Temperature: -25°C~+55°
Insulator Flammability: UL94 VO
Withstand Voltage: 2000V
Form of Electricity: 1 Phase